

LG Ally VS740 Screen Replacement

Will help guide you into successfully replacing the screen

Written By: Billy Carias

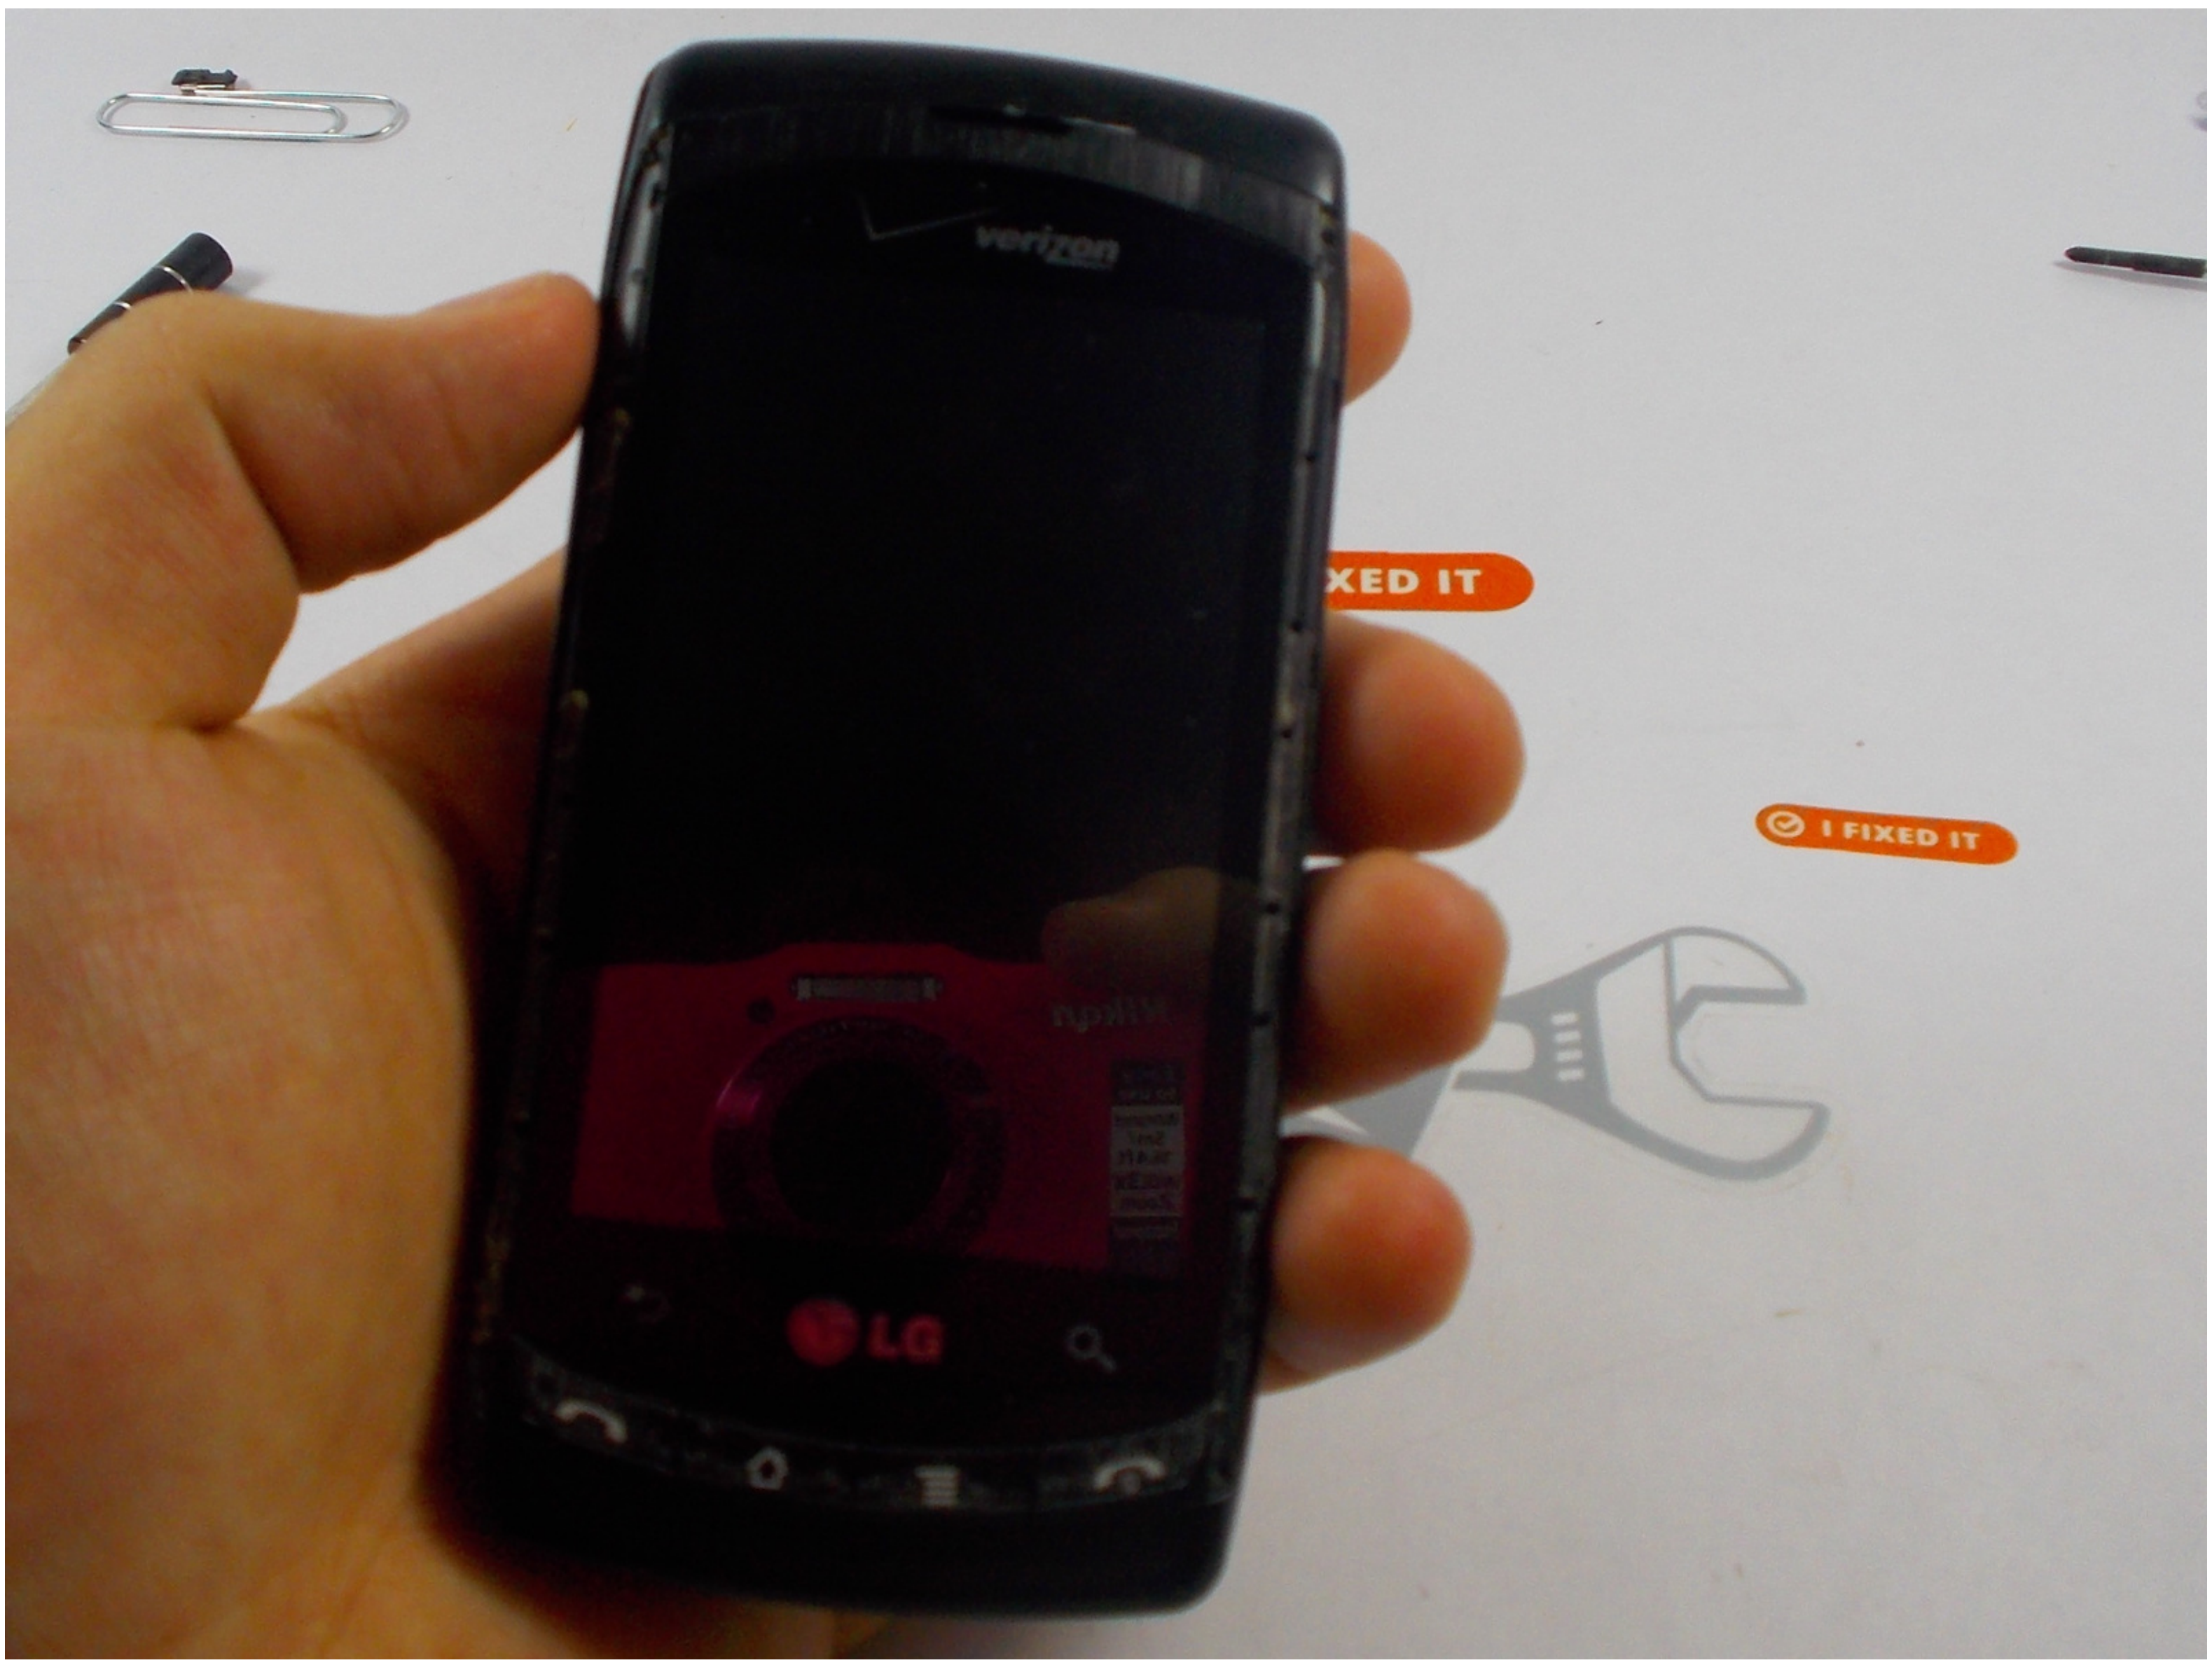



Step 1 — Screen Replacement

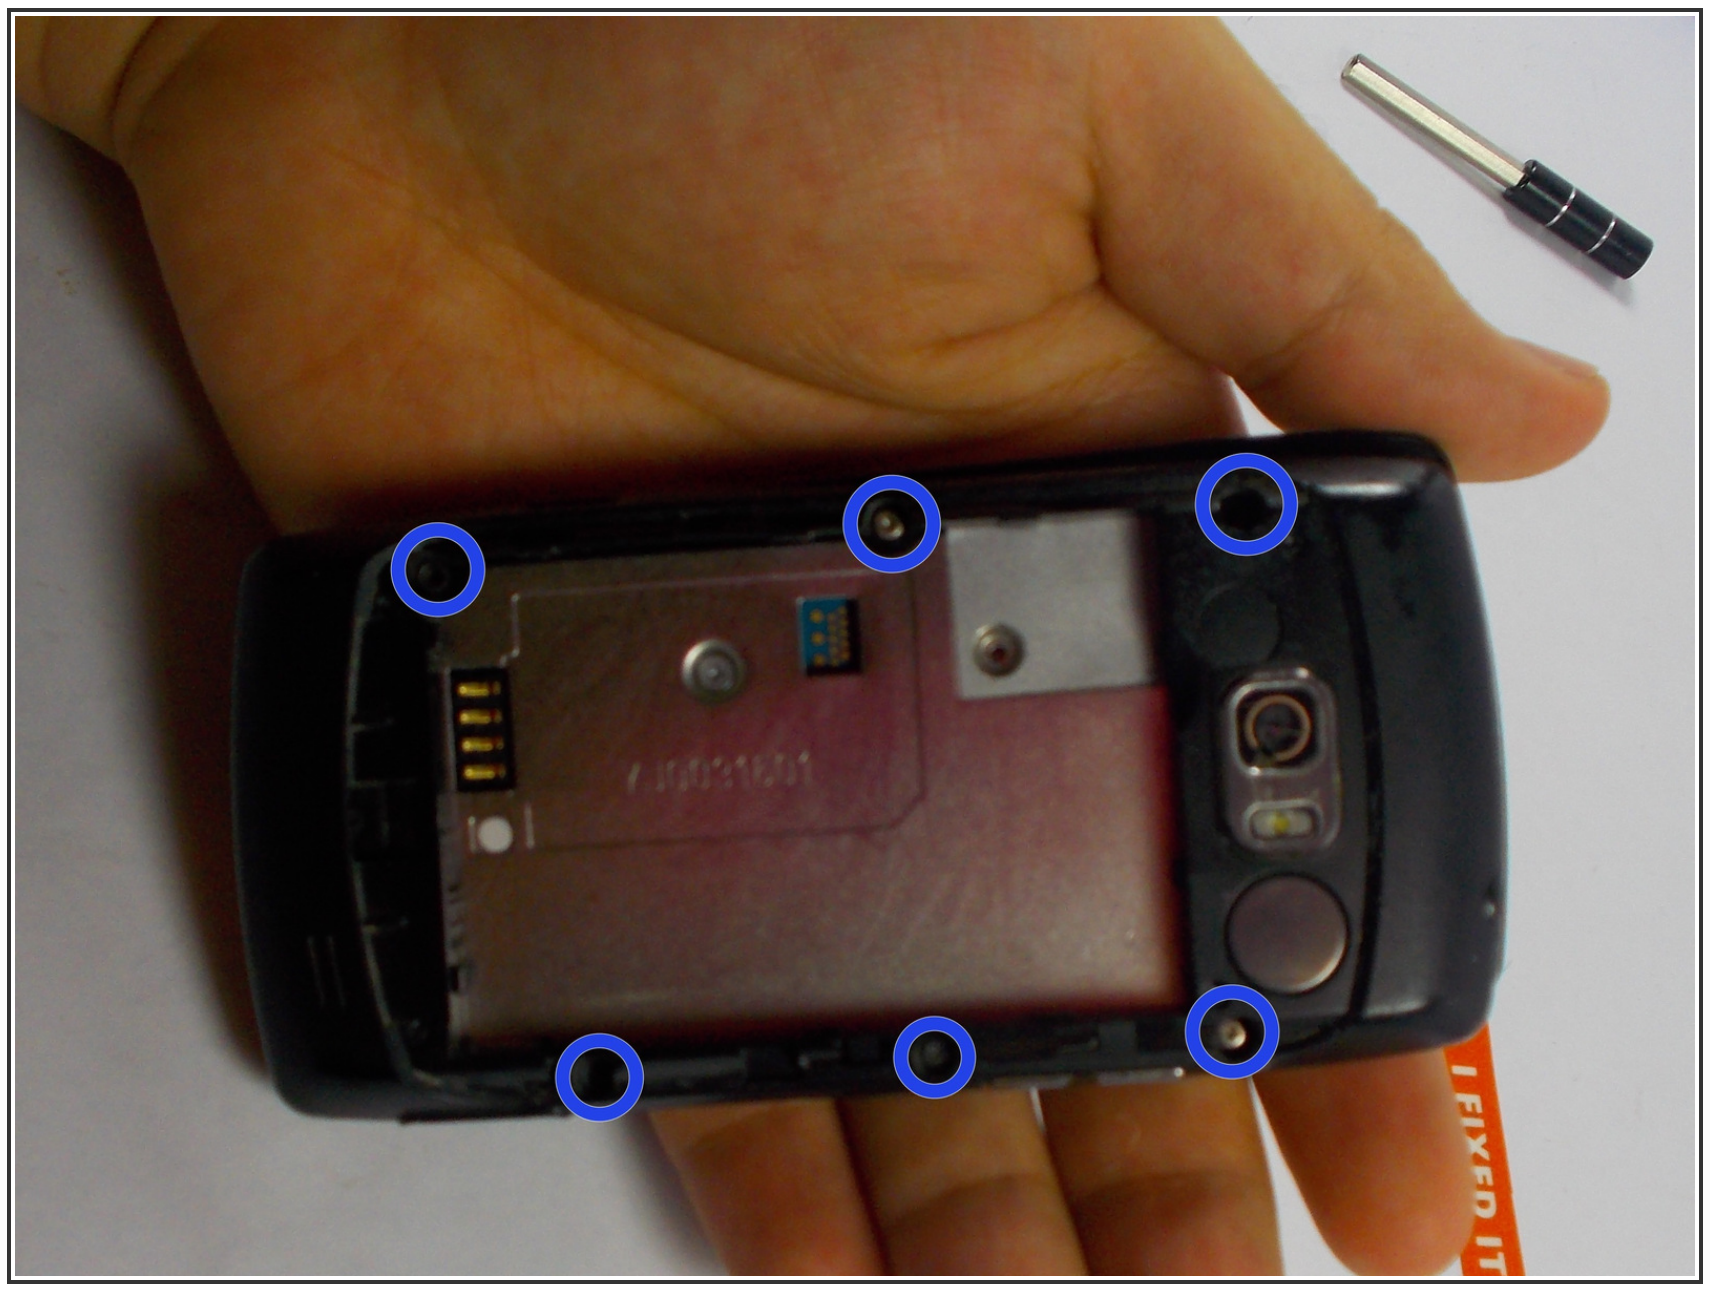

- Remove Battery
- Remove all 6 screws that are on the outer edge of phone


Step 2

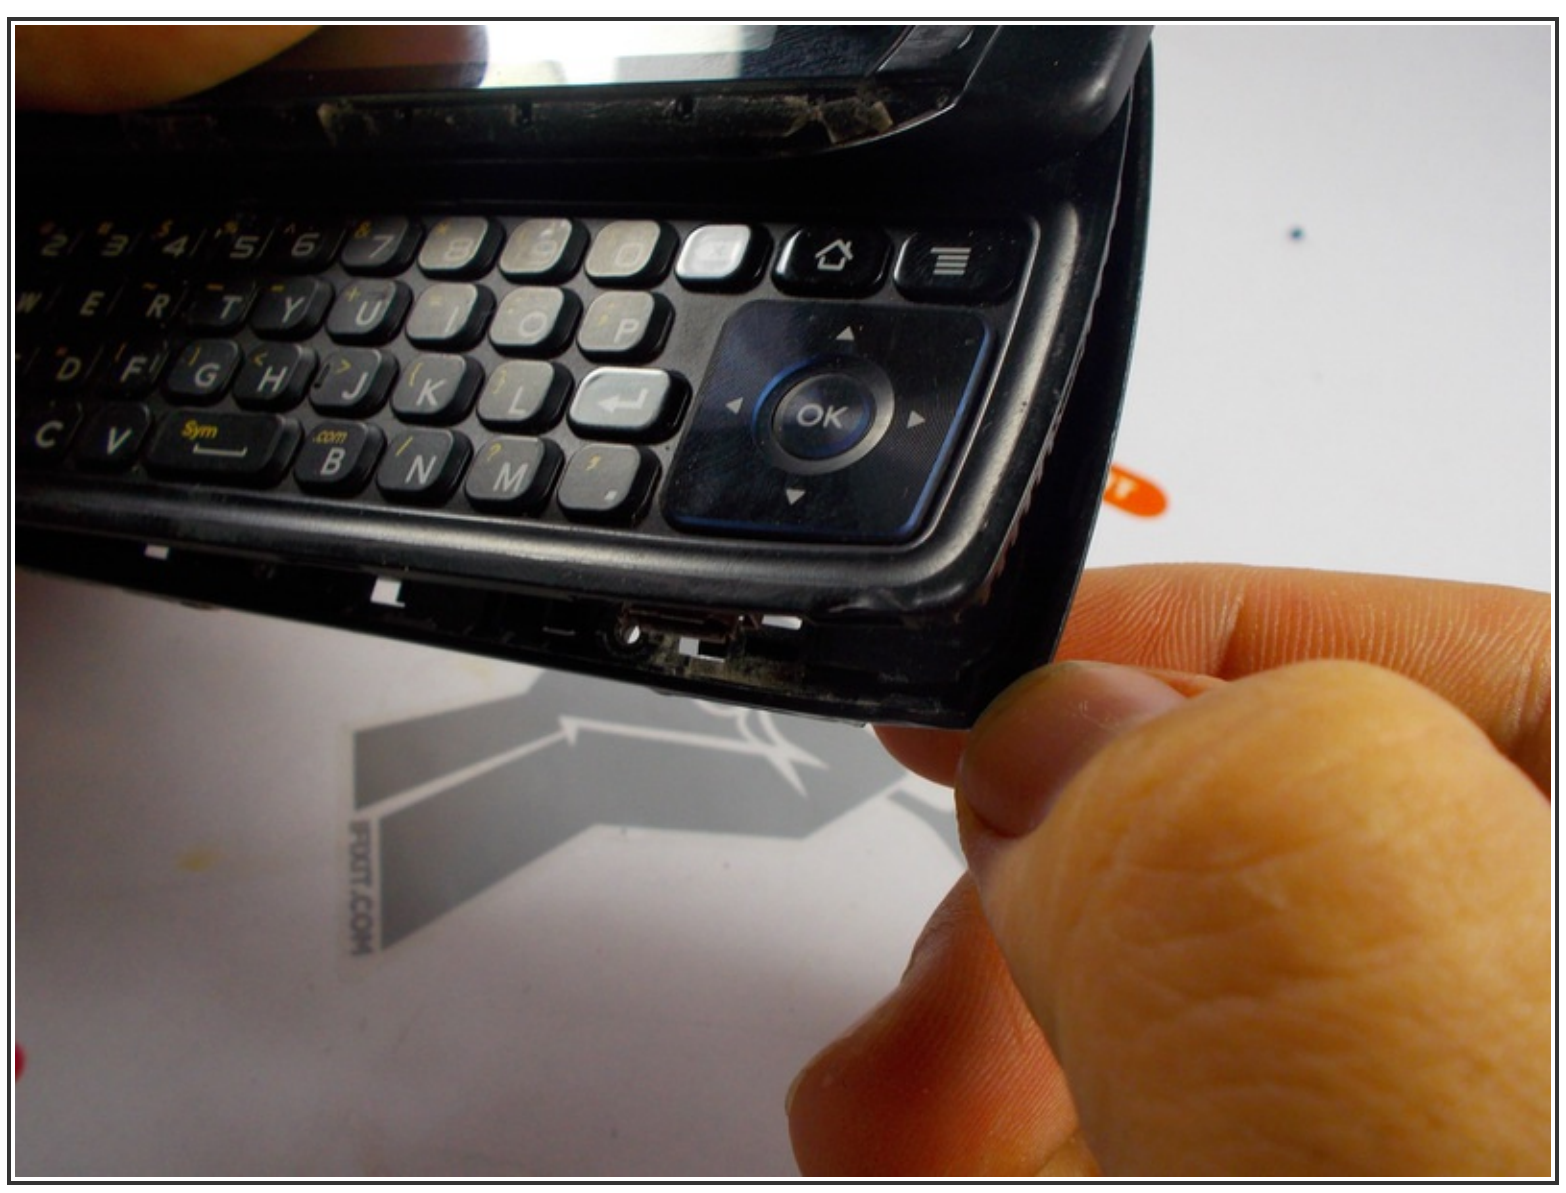


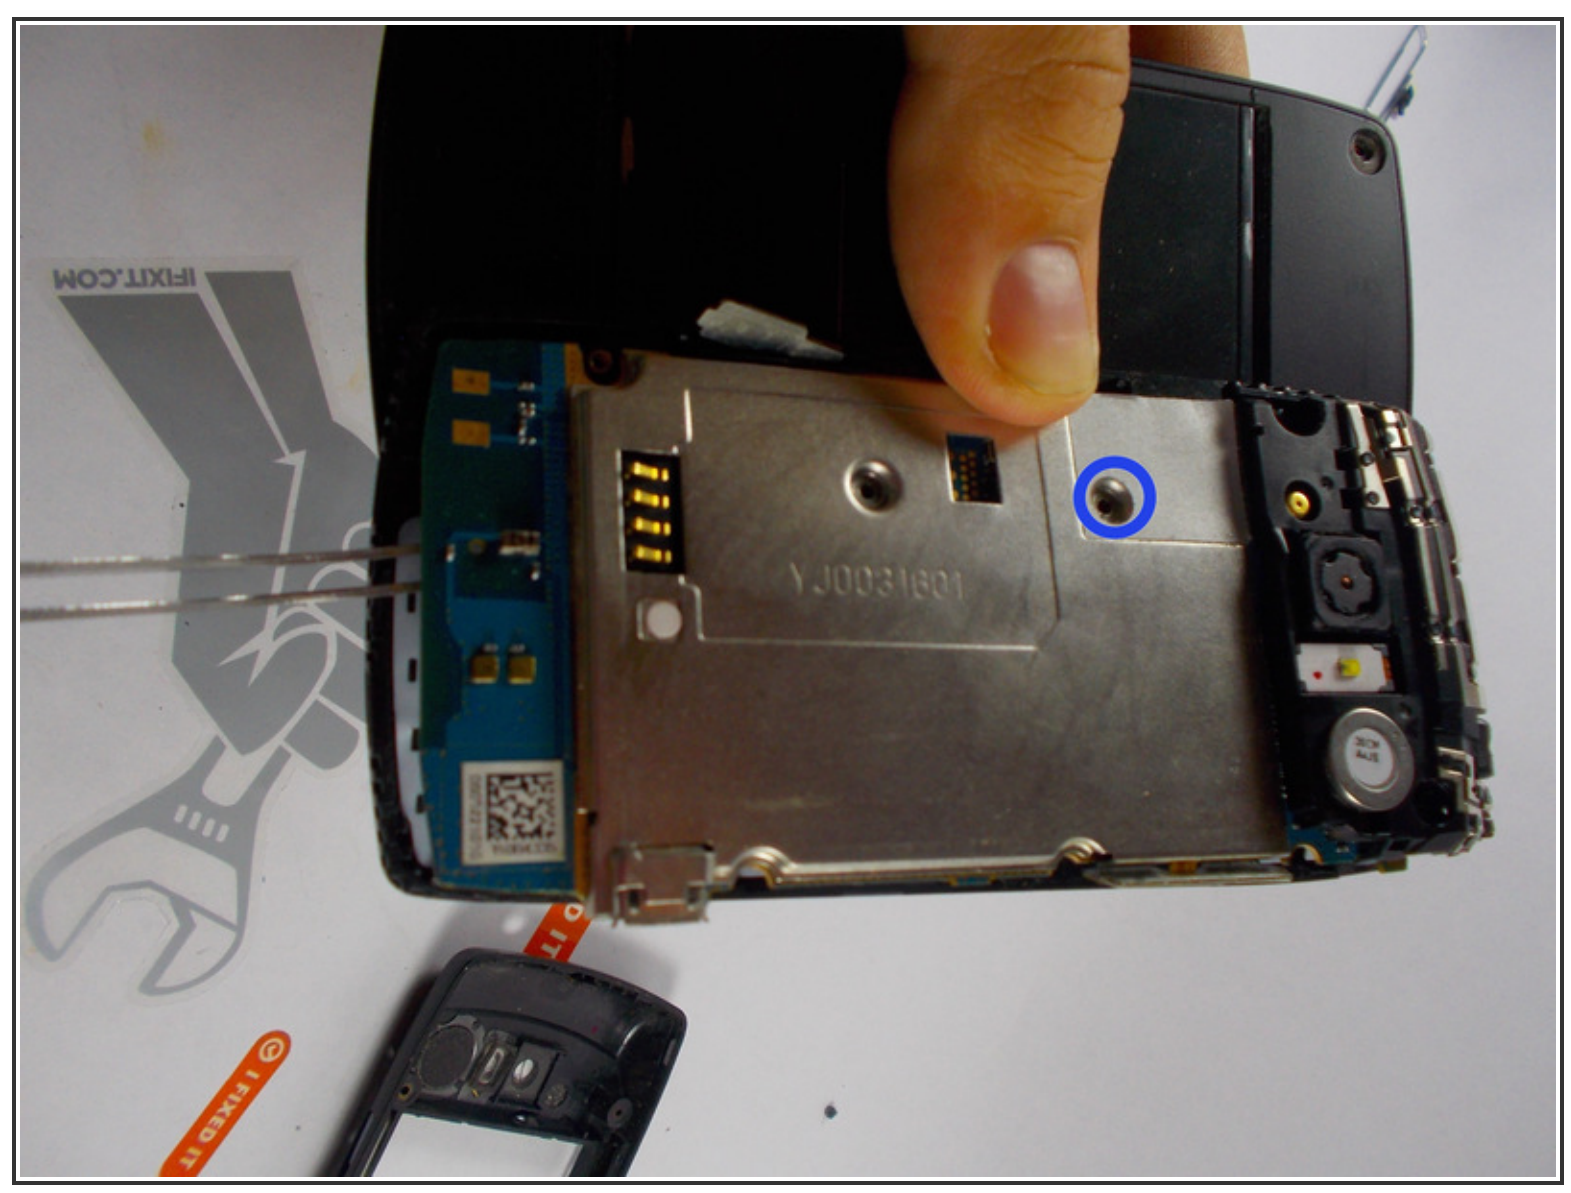

- Remove backcasing connected to the rest of the phone.
- Remove the phillip screw from the small white box on the top left corner that's on the battery platform of the phone.


Step 3

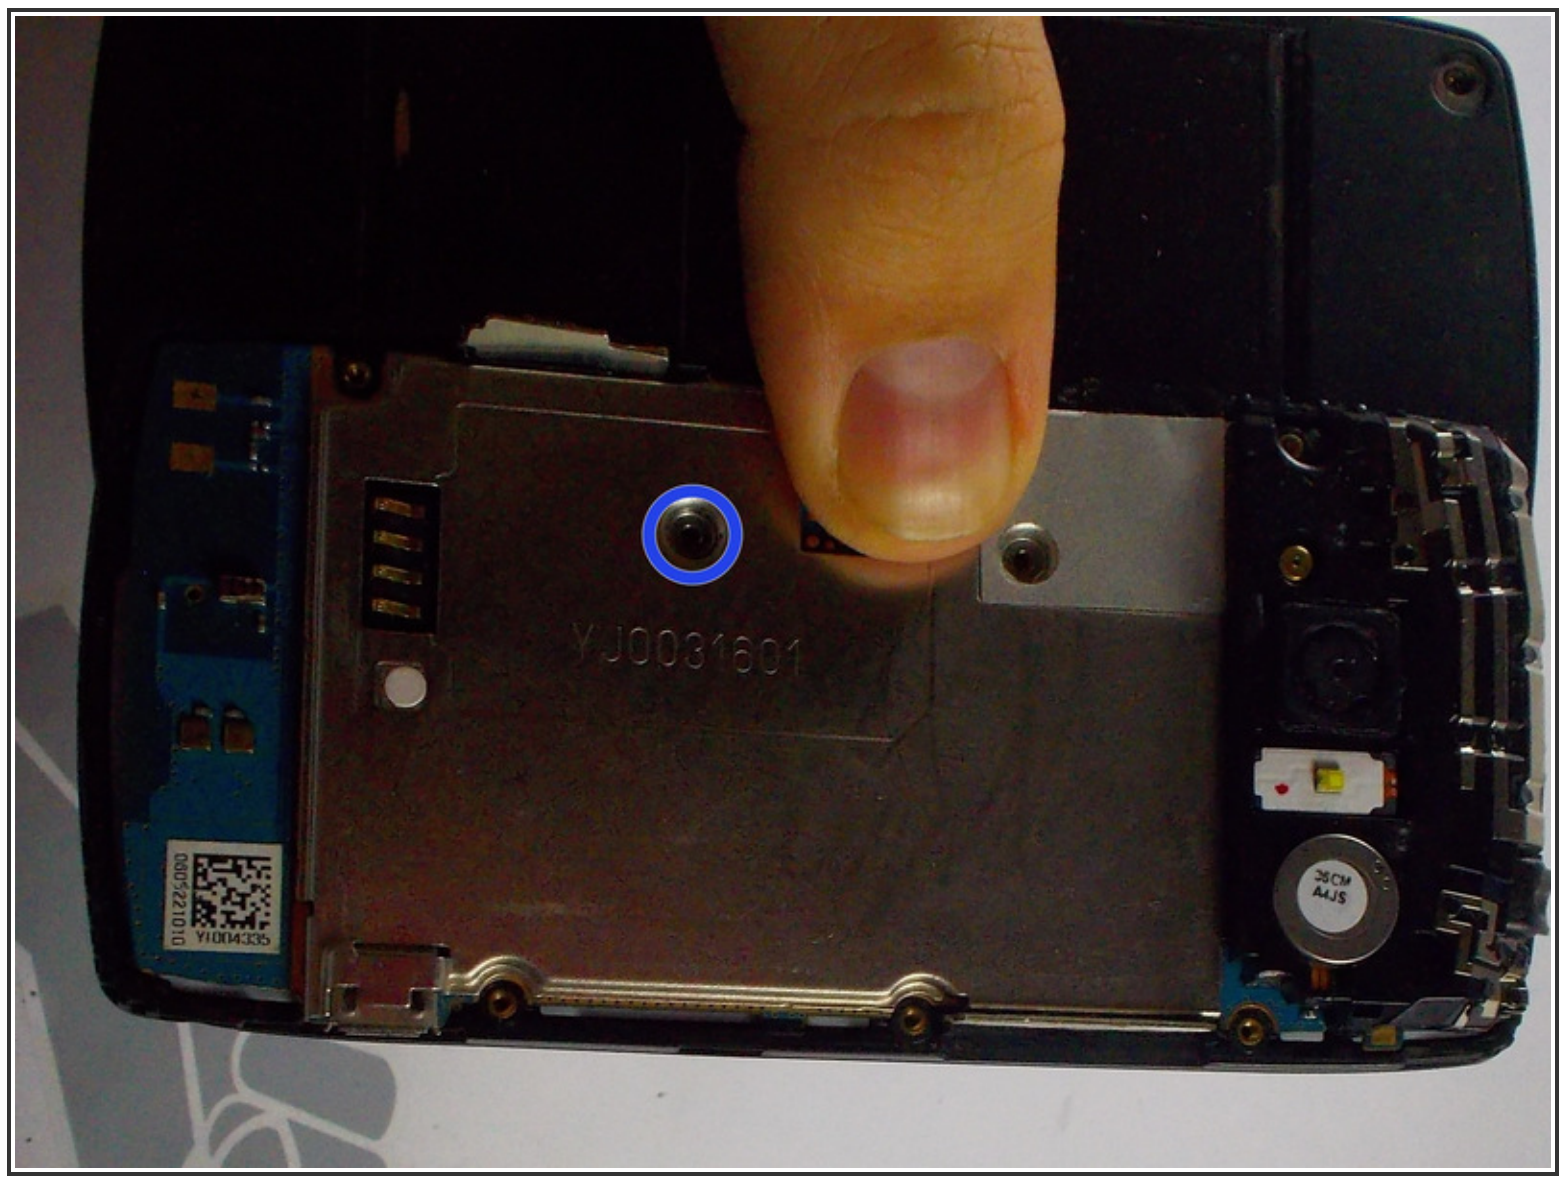

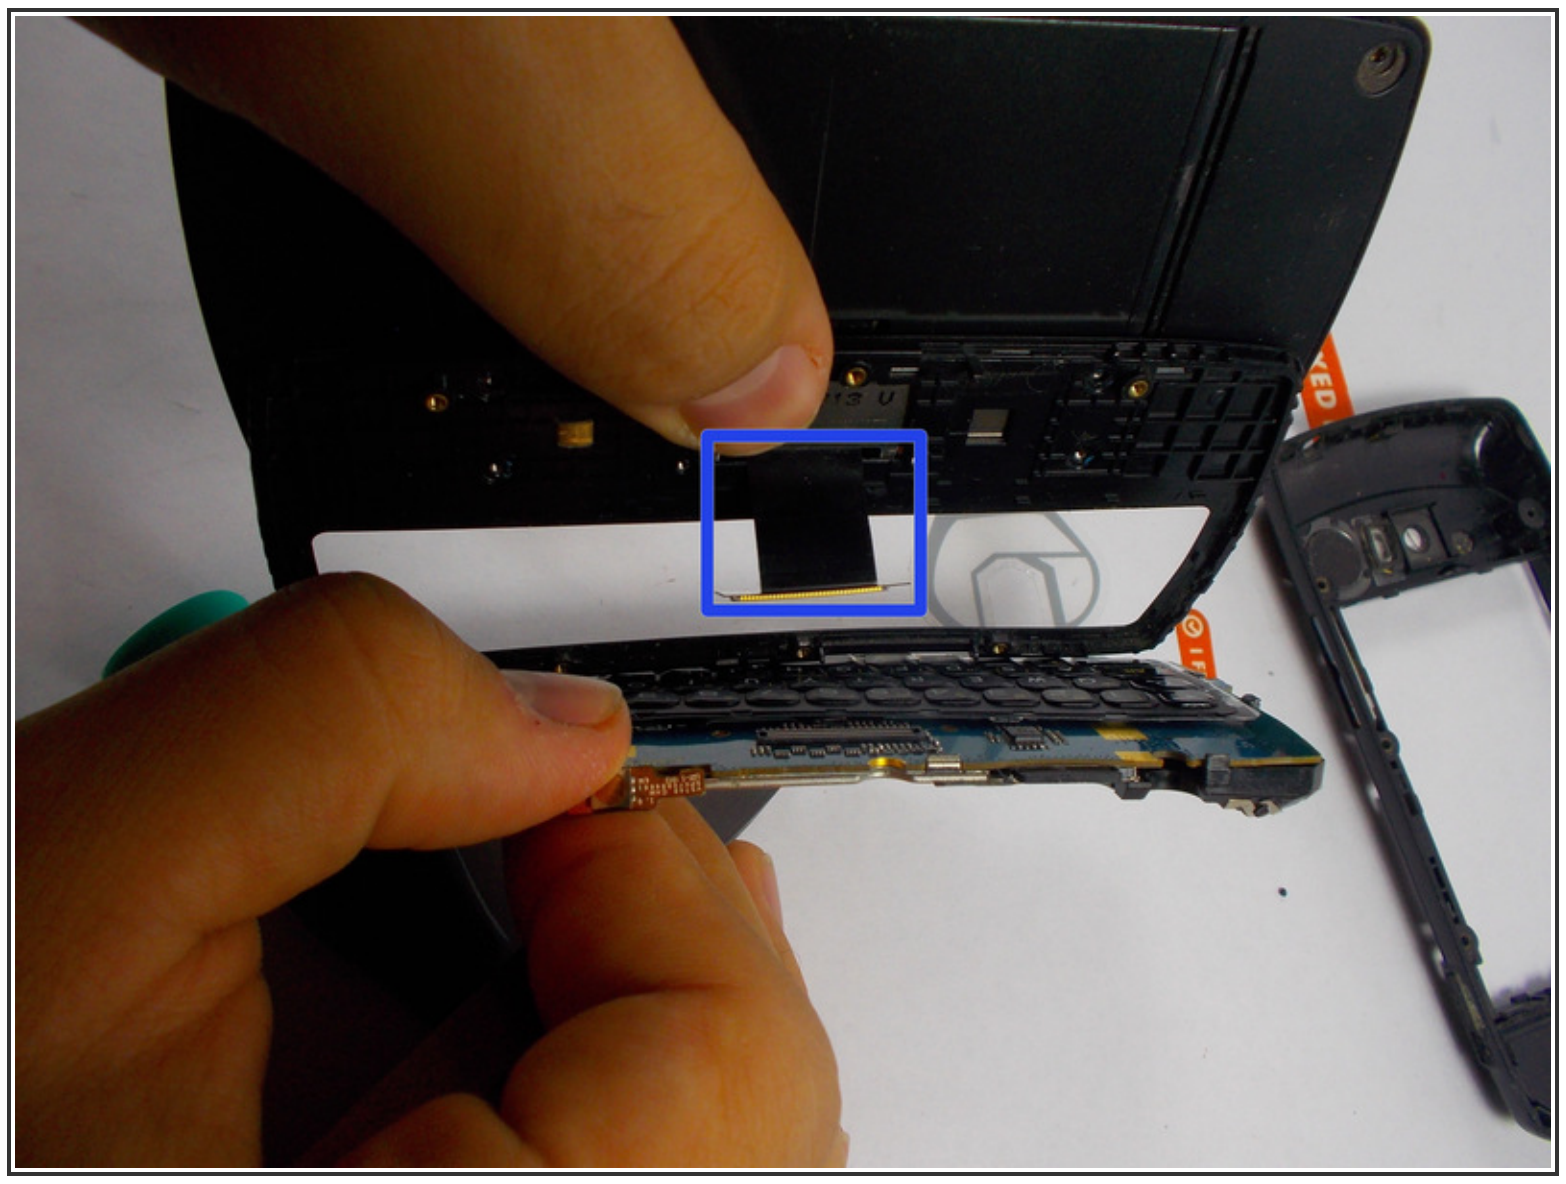


- Remove phone sticker and remove screw under the sticker. Now you can remove the motherboard. Be careful with the tether still connected to it.
- Remove tether.

Step 4

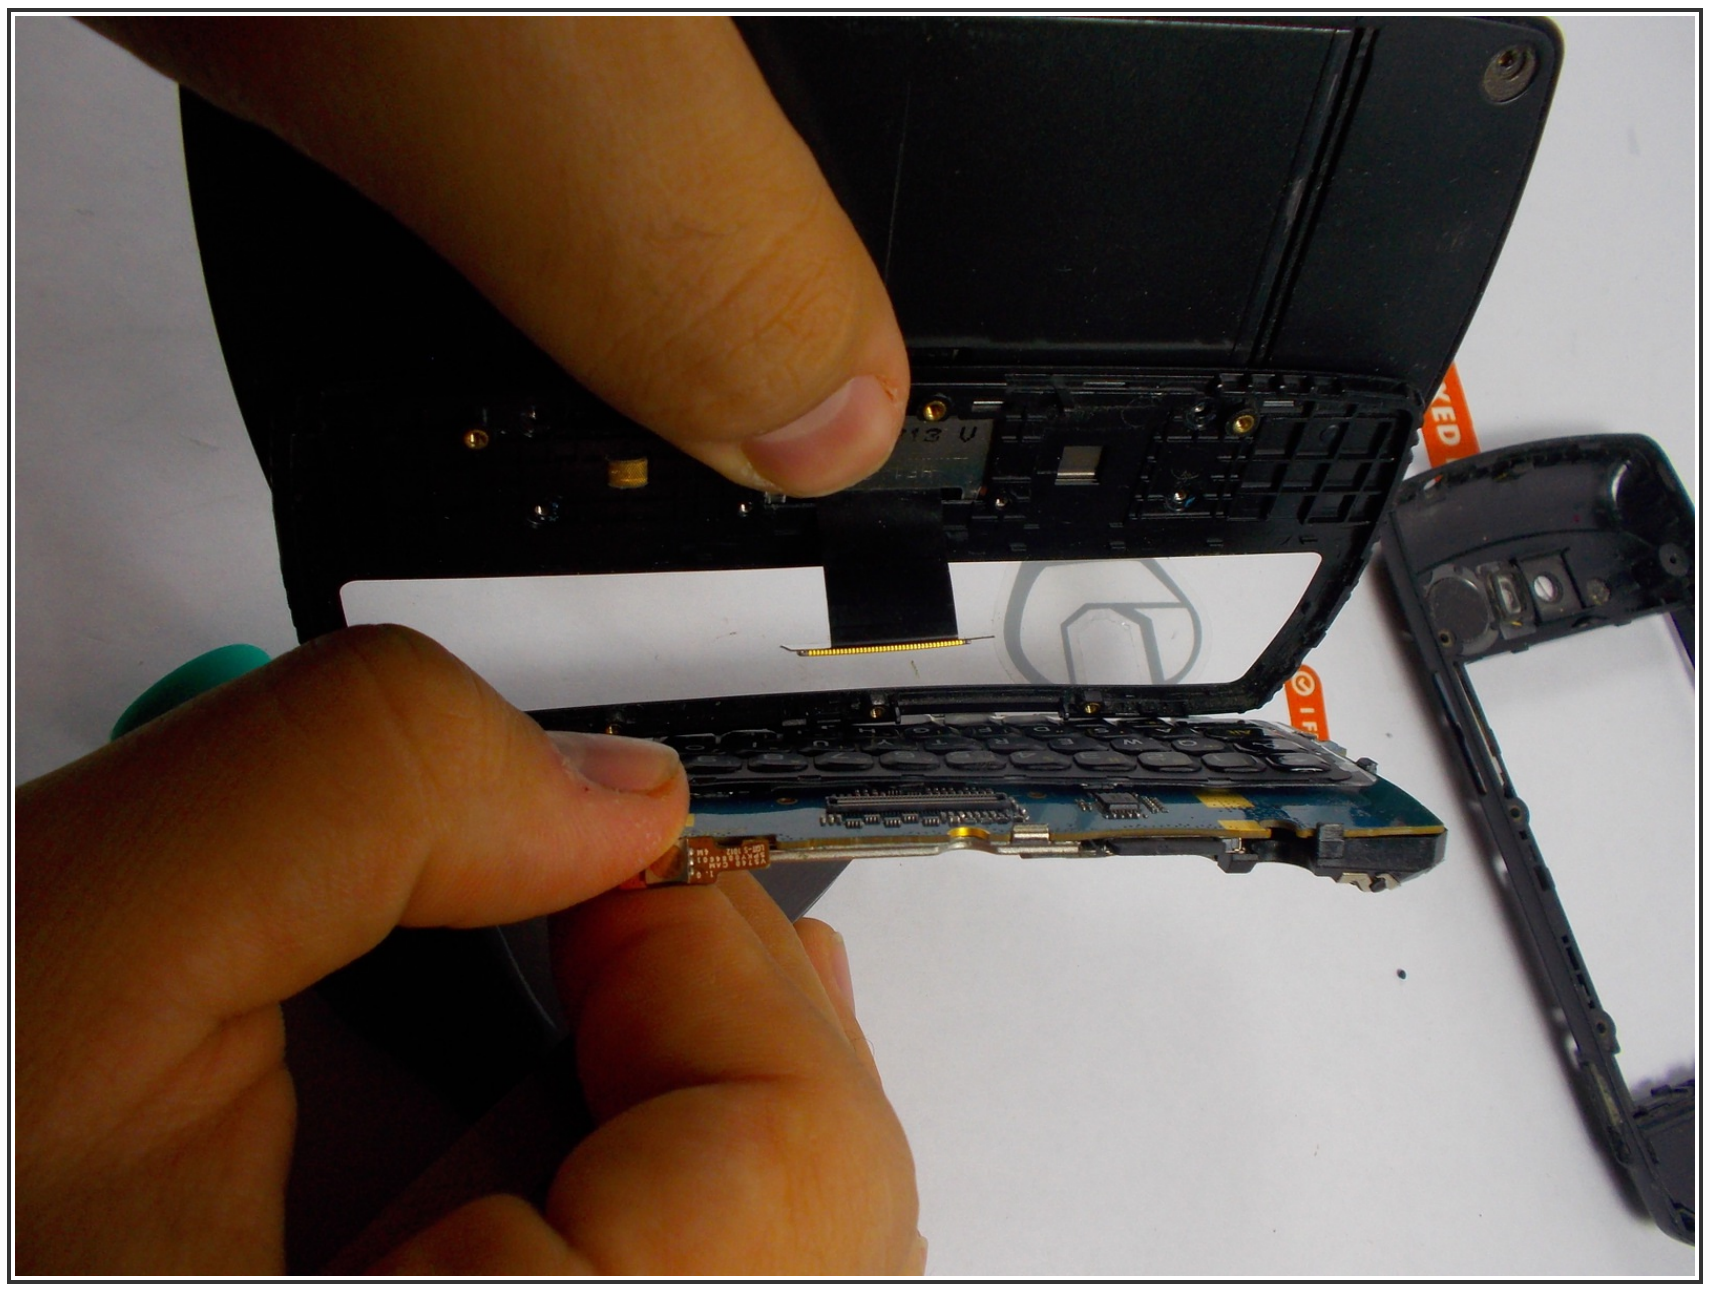


- Remove the keyboard, and the rubber caps behind the phone.
- To the right hand side of where the keyboard was, remove the four screws shown.

Step 5

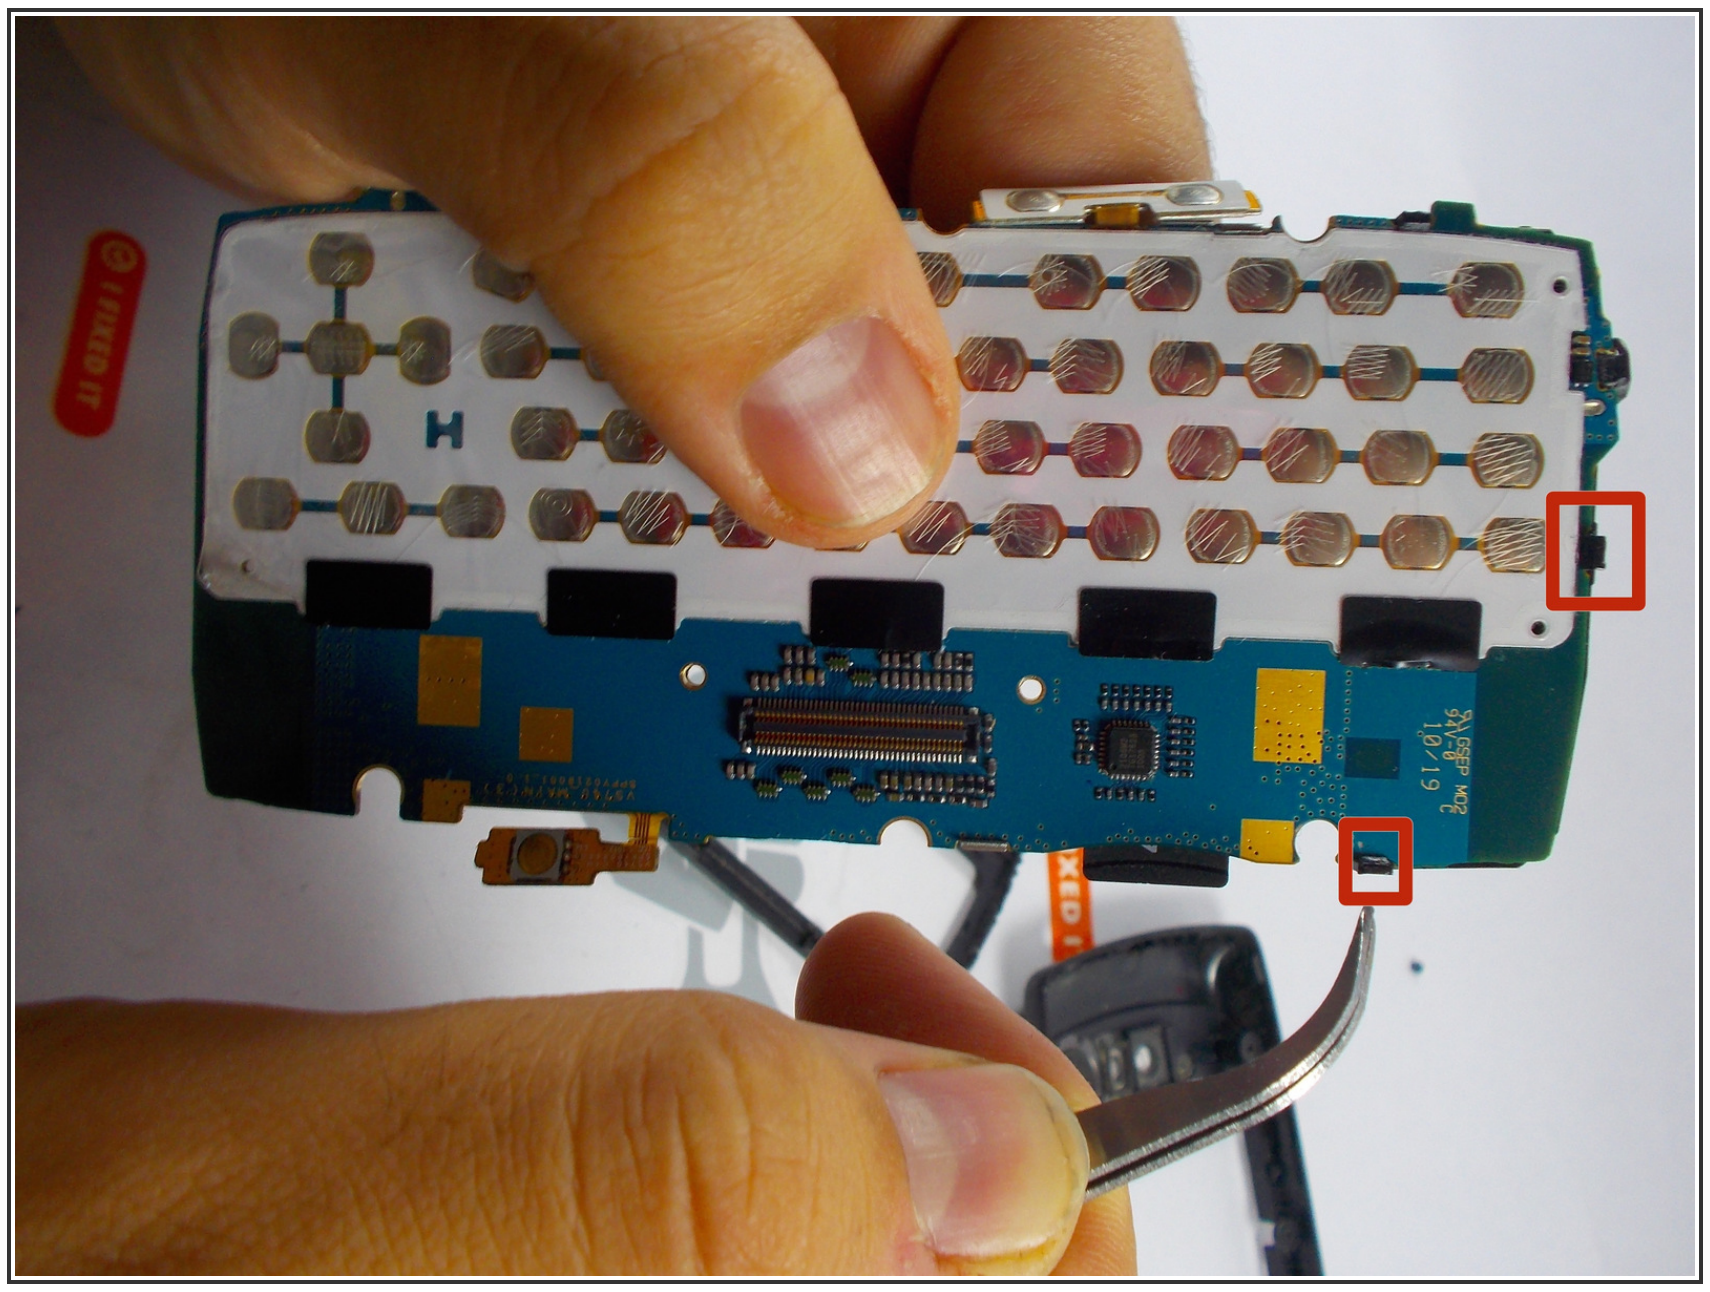


- Release clips with prying tool and take off the next layer of the phone.

Step 6

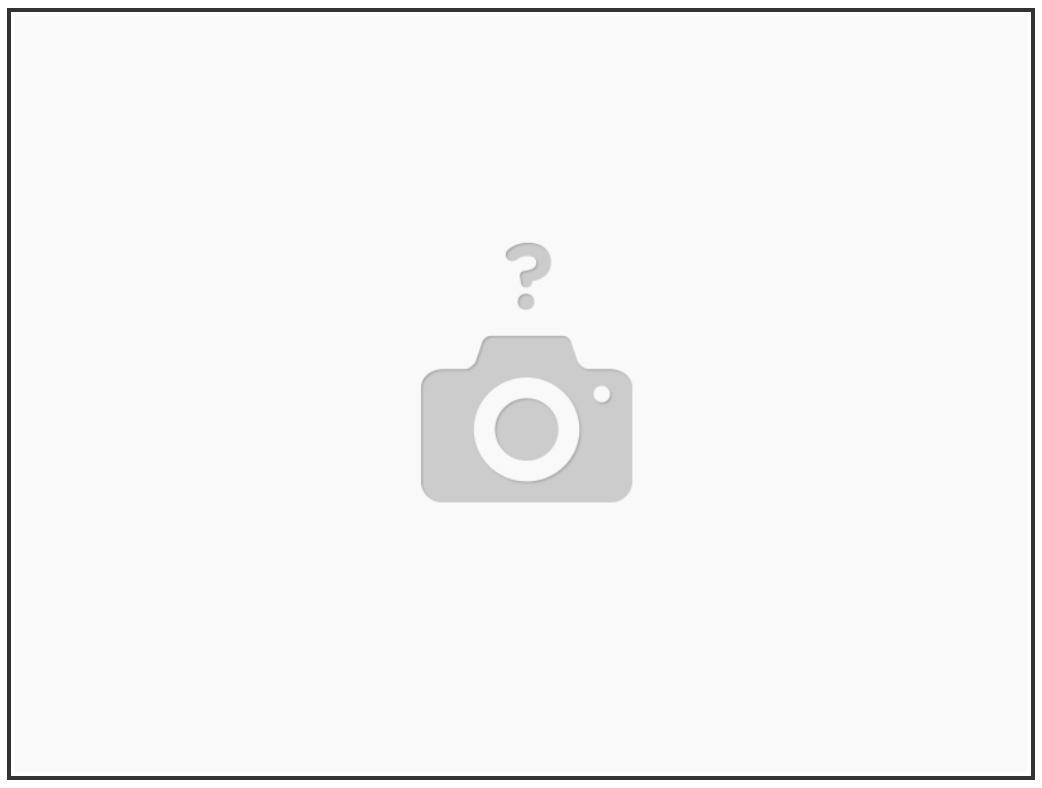

- Release the pop-connectors, and the flex cable at the top by the speaker.
- . Now you can easily remove the yellow cabling on the phone.

Step 7

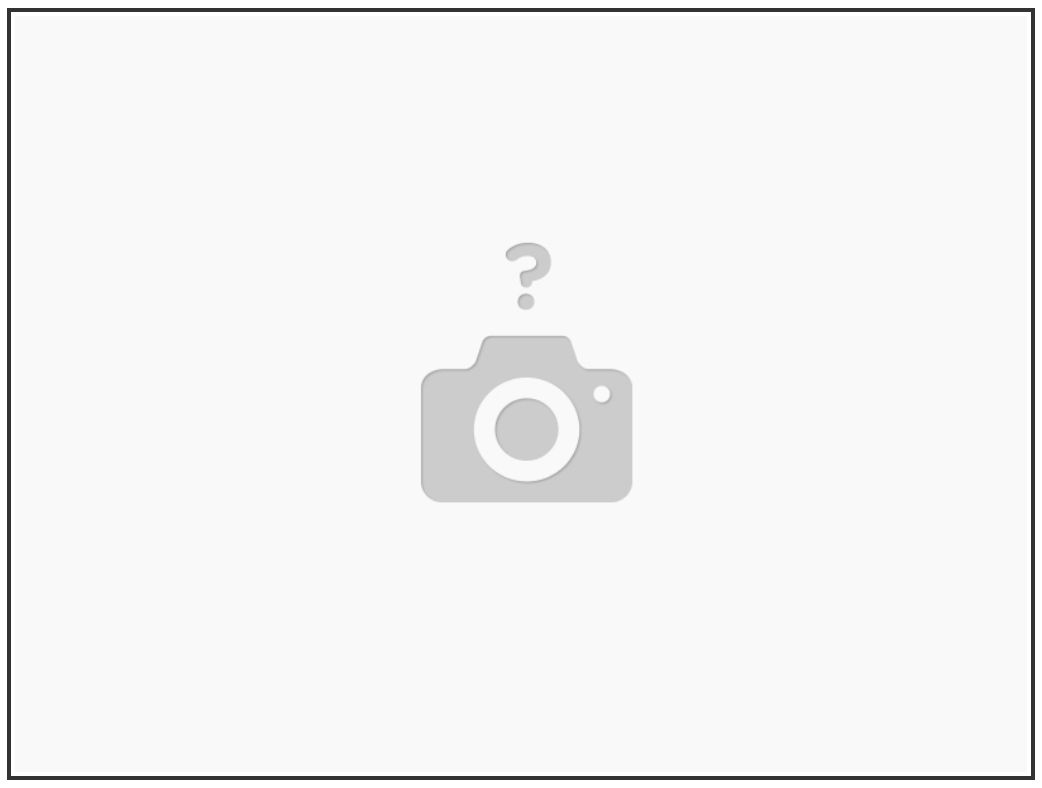

- Release jaw connector. Now remove LCD screen. You can now replace the screen.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-07 10:06:25 PM.